


# InCord WebNets™

High-tension, low deflection containment for a variety of applications.



**InCord®**  
Custom Safety Netting Solutions

InCord WebNets can be used where minimal deflection is required, such as Conveyor Guard, Truck Nets, Rack Guard and Loading Dock Nets.


- Rack Guard
- Conveyor Guard
- Truck Nets
- Loading Dock Nets



## Webbing Materials & Specifications

InCord WebNets™ can be produced with a variety of in-stock webbing from 1" to 2" widths. Standard webbing is available in polyester, nylon and polypropylene.

Size	Fiber	Thickness	Tensile Strength	Color(s)
1 inch	Polyester	.05 inch	2,200 lbs	Black
1-1/2 inch	Polyester	.065 inch	6,000 lbs	Green
2 inch	Polyester	.05 inch	6,000 lbs	Black
2 inch	Nylon	.05 inch	5,000 lbs	Black
2 inch	Polypropylene	.06 inch	1,600 lbs	Black, Red

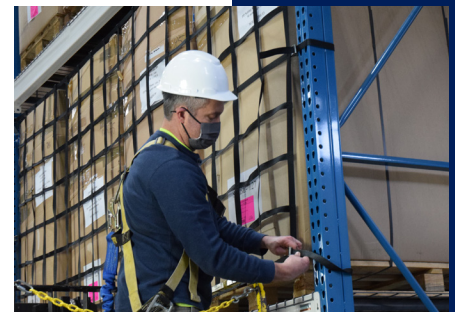



## Hardware Options for any Application

A diverse array of net terminations, including web loops, grommets, snap hooks, steel rings, cam buckles and more, are available to ensure the right fastening system for your application.



**Web Loop**

Some of our most popular attachment options:




**D-Ring**  
1-1/4 inch  
Nickel Plated Steel



**Swivel Snap Hook**  
3-1/4 inch (1-1/16 inch ID)  
Stainless Steel



**Cam Buckle**  
1 inch, 2 inch  
Galvanized Steel

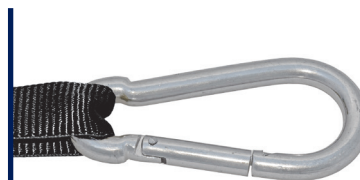

**Snap Hook**  
120 mm, 80 mm  
Zinc Plated Steel



**Grommet**  
7/16 inch ID  
Stainless Steel



**Ring**  
2-1/2 inch, 3 inch  
Zinc Plated Steel

