


# InCord WebNets™

High-tension, low deflection containment for a variety of applications.



**InCord™**  
Custom Safety Netting Solutions

InCord WebNets can be used where minimal deflection is required, such as Conveyor Guard, Truck Nets, Rack Guard and Loading Dock Nets.


- Rack Guard
- Conveyor Guard
- Truck Nets
- Loading Dock Nets



## Webbing Materials & Specifications

InCord WebNets can be produced with a variety of in-stock webbing from 1" to 2" widths. Standard webbing is available in polyester, nylon and polypropylene. WebNet rack guard systems are available in two configurations: flush-mount or offset.

Size	Fiber	Thickness	Tensile Strength	Color(s)
1 inch	Polyester	.05 inch	2,200 lbs	Black
1-1/2 inch	Polyester	.065 inch	6,000 lbs	Green
2 inch	Polyester	.036 inch	4,000 lbs	Black
2 inch	Nylon	.05 inch	5,000 lbs	Black
2 inch	Polypropylene	.06 inch	1,600 lbs	Black, Red

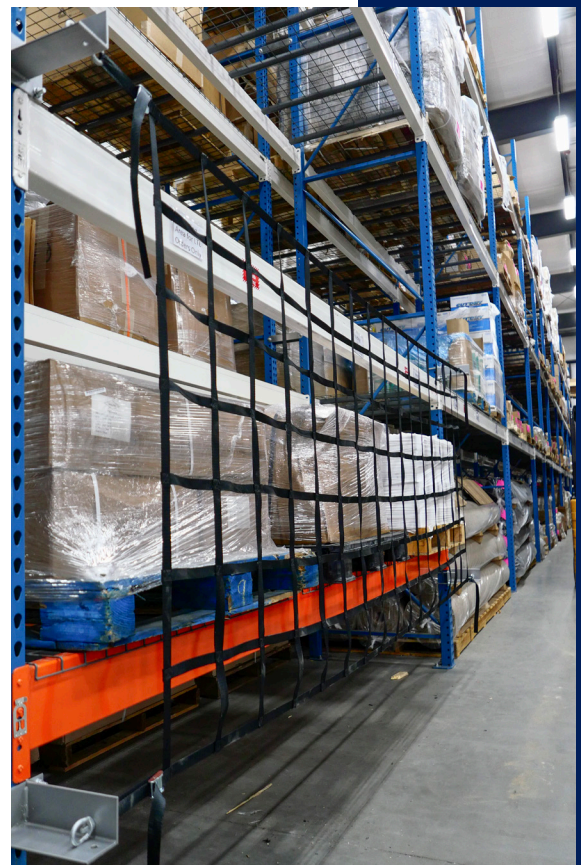

## Hardware Options for any Application

A diverse array of net terminations, including web loops, grommets, snap hooks, steel rings, cam buckles and more, are available to ensure the right fastening system for your application.



Web Loop

Some of our most popular attachment options:




**D-Ring**  
1-1/4 inch  
Nickel Plated Steel



**Swivel Snap Hook**  
3-1/4 inch (1-1/16 inch ID)  
Stainless Steel



**Cam Buckle**  
1 inch, 2 inch  
Galvanized Steel

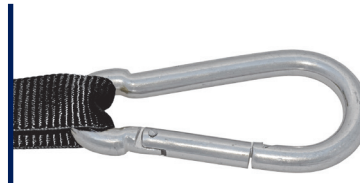

**Snap Hook**  
120 mm, 80 mm  
Zinc Plated Steel



**Grommet**  
7/16 inch ID  
Stainless Steel



**Ring**  
2-1/2 inch, 3 inch  
Zinc Plated Steel

